

## SLR-12-0


**Primary application: Roof**

**Height** 2" / 50.8mm

**Width** 12" / 305mm

**Perforated options for aluminum**

Produced at: Bristol CT, Fontana CA, DeLand FL, Portable

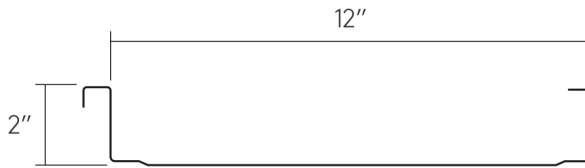

### Suggested Metals

Galvalume 24, 22, 20 ga  
aluminum .032, .040  
zinc .8mm, 1mm  
copper 16, 20 oz.  
stainless steel 24 ga

### Testing Information

ASTM 1592 for aluminum and Galvalume  
ASTM 283/331 for aluminum and Galvalume (solid panels)  
FM Approvals completed \*reference RoofNav for specific assembly and gauge  
Florida Product Approval 24 and 22 gauge only

*Span charts for untested gauges/materials are calculated using section properties. Untested/perforated panels require side stitching/exposed fasteners.*

